AUDIO

FOR EVERY SPACE.

Portable speakers. Home audio. Karaoke. Clock speakers.

Source Globally. Trade Seamlessly.

59 product listings Custom products and OEM manufacturing support

SOURCING / PROCUREMENT / LOGISTICS

Specifications translated from the supplied September 2026 product catalogue. Availability and final configurations are confirmed with your quotation.

From product brief to delivery.

Sourcing and Procurement

Product search, supplier coordination and purchasing support.

Custom Products

Product, colour, branding and packaging requirements coordinated to your brief.

OEM Manufacturing

Private-label production coordination; final scope and MOQ confirmed by model.

Logistics - Air, Land and Sea

Transport planning and shipment coordination for your destination.

QC and Reporting

Inspection coordination, agreed quality checks and reporting.

Documentation

Order and shipping document coordination.

Negotiation

Support with price, payment terms, production and delivery schedules.

Find your model

CSL catalogue codes are used for enquiries and order coordination.

CSL-AU-001	Portable Bluetooth speaker	5
CSL-AU-002	Portable Bluetooth speaker	6
CSL-AU-003	Portable Bluetooth speaker	7
CSL-AU-004	Portable Bluetooth speaker	8
CSL-AU-005	Portable Bluetooth speaker	9
CSL-AU-006	Portable Bluetooth speaker	10
CSL-AU-007	Portable Bluetooth speaker	11
CSL-AU-008	Portable Bluetooth speaker	12
CSL-AU-009	Portable Bluetooth speaker	13
CSL-AU-010	Portable Bluetooth speaker	14
CSL-AU-011	Portable Bluetooth speaker	15
CSL-AU-012	Karaoke / party speaker	16
CSL-AU-013	Clock & home speaker	17
CSL-AU-014	Compact Bluetooth speaker	18
CSL-AU-015	Compact Bluetooth speaker	19
CSL-AU-016	Portable Bluetooth speaker	20
CSL-AU-017	Desktop speaker system	21
CSL-AU-018	Desktop speaker system	22
CSL-AU-019	Desktop speaker system	23
CSL-AU-020	Portable Bluetooth speaker	24
CSL-AU-021	Portable Bluetooth speaker	25
CSL-AU-022	Portable Bluetooth speaker	26
CSL-AU-023	Portable Bluetooth speaker	27
CSL-AU-024	Karaoke / party speaker	28
CSL-AU-025	Karaoke / party speaker	29
CSL-AU-026	Karaoke / party speaker	30
CSL-AU-027	Compact Bluetooth speaker	31
CSL-AU-028	Compact Bluetooth speaker	32
CSL-AU-029	Compact Bluetooth speaker	33
CSL-AU-030	Compact Bluetooth speaker	34

Find your model

CSL catalogue codes are used for enquiries and order coordination.

CSL-AU-031	Compact Bluetooth speaker	35
CSL-AU-032	Compact Bluetooth speaker	36
CSL-AU-033	Compact Bluetooth speaker	37
CSL-AU-034	Compact Bluetooth speaker	38
CSL-AU-035	Compact Bluetooth speaker	39
CSL-AU-036	Compact Bluetooth speaker	40
CSL-AU-037	Compact Bluetooth speaker	41
CSL-AU-038	Compact Bluetooth speaker	42
CSL-AU-039	Compact Bluetooth speaker	43
CSL-AU-040	Compact Bluetooth speaker	44
CSL-AU-041	Desktop speaker system	45
CSL-AU-042	Clock & home speaker	46
CSL-AU-043	Clock & home speaker	47
CSL-AU-044	Clock & home speaker	48
CSL-AU-045	Clock & home speaker	49
CSL-AU-046	Clock & home speaker	50
CSL-AU-047	Clock & home speaker	51
CSL-AU-048	Clock & home speaker	52
CSL-AU-049	Clock & home speaker	53
CSL-AU-050	Clock & home speaker	54
CSL-AU-051	Clock & home speaker	55
CSL-AU-052	Clock & home speaker	56
CSL-AU-053	Portable Bluetooth speaker	57
CSL-AU-054	Portable Bluetooth speaker	58
CSL-AU-055	Portable Bluetooth speaker	59
CSL-AU-056	Portable Bluetooth speaker	60
CSL-AU-057	Karaoke / party speaker	61
CSL-AU-058	Portable Bluetooth speaker	62
CSL-AU-059	Portable Bluetooth speaker	63

CSL-AU-001

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Features	Bluetooth , AUX, USB drive , TF card, Lighting, Calling
Bluetooth chipset	Mountain View
Bluetooth version	6.0
Wireless range	≤10M
Battery	4000mAh(21700) 7.4V
Charging input	DC5V 2A
Charging port	USB-C
Connectivity	Bluetooth, AUX, USB drive, TF card
Impedance	4Ω
Output power	100W(Bass 60W + Treble 40W)
Signal-to-noise ratio	>85dB
Frequency response	40Hz-20kHz
Dimensions	L 281.1 x H 107 x D 84.4mm
Housing material	ABS + fabric mesh + silicone + PC lens
Net weight	2120G
Charging time	Approx. 4 h
Playback time	5-6 h(50% volume),maximum volume 2-3 h
IP rating	IPX5 (source-stated)

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-002

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Features	Bluetooth , AUX, USB drive , TF card, Lighting, Calling
Bluetooth chipset	AB
Bluetooth version	Bluetooth 6.0
Wireless range	≤10M
Battery	2000mAh(18650) 7.4V
Charging input	DC5V 2A
Charging port	USB-C
Connectivity	Bluetooth, AUX, USB drive, TF card
Impedance	3Ω
Output power	30W(2 x 15W)
Signal-to-noise ratio	>80dB
Frequency response	50Hz-20kHz
Dimensions	247W x 145 h x 97D mm
Housing material	ABS + fabric mesh + silicone
Net weight	1156G
Charging time	Approx. 3 h
Playback time	6-7 h(50% volume),maximum volumeApprox. 2-3 h
IP rating	IPX5 (source-stated)

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-003

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Features	Bluetooth , AUX, USB drive , TF card, Lighting, Calling
Bluetooth chipset	AB
Bluetooth version	Bluetooth 6.0
Wireless range	≤10M
Battery	2600mAh(18650) 7.4V
Charging input	DC5V 2A
Charging port	USB-C
Connectivity	Bluetooth, AUX, USB drive, TF card
Impedance	3Ω
Output power	40W(2 x 20W)
Signal-to-noise ratio	>80dB
Frequency response	50Hz-20kHz
Dimensions	281W x 165 h x 111D mm
Housing material	ABS + fabric mesh + silicone
Net weight	1566G
Charging time	Approx. 3 h
Playback time	5-6 h(50% volume),maximum volumeApprox. 2-3 h
IP rating	IPX5 (source-stated)

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-004

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Features	Bluetooth , AUX, USB drive , TF card, Lighting, Calling
Bluetooth chipset	AB
Bluetooth version	Bluetooth 6.0
Wireless range	≤10M
Battery	4000mAh(21700) 7.4V
Charging input	DC5V 2A
Charging port	USB-C
Connectivity	Bluetooth, AUX, USB drive, TF card
Impedance	3Ω
Output power	60W(2 x 30W)
Signal-to-noise ratio	>80dB
Frequency response	50Hz-20kHz
Dimensions	320W x 185 h x 126D mm
Housing material	ABS + fabric mesh + silicone
Net weight	2160G
Charging time	Approx. 3 h
Playback time	Approx. 5 h(50% volume),maximum volumeApprox. 2 h
IP rating	IPX5 (source-stated)

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-005

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Features	Bluetooth , AUX, USB drive , TF card, Lighting, Calling
Bluetooth chipset	Mountain View
Bluetooth version	Bluetooth 5.3
Wireless range	≤10M
Battery	4000mAh(21700) 7.4V
Charging input	DC5V 2A
Charging port	USB-C
Connectivity	Bluetooth, AUX, USB drive, TF card
Impedance	4Ω
Output power	Bass40W x 1 + Treble15W x 2
Signal-to-noise ratio	>80dB
Frequency response	100Hz-20kHz
Dimensions	318.04W x 124.36 h x 184.23D mm
Housing material	ABS + PC + fabric mesh + silicone
Net weight	2244 G
Charging time	Approx. 4 h
Playback time	5-6 h(50% volume)
IP rating	IPX5 (source-stated)
Options	Microphone optional; confirm package contents.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-006

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Features	Bluetooth , AUX, USB drive , TF card, lighting, Calling
Bluetooth chipset	Mountain View
Bluetooth version	Bluetooth 5.3
Wireless range	≤10M
Battery	4000mAh(21700) 7.4V
Charging input	DC5V 3A
Charging port	USB-C
Connectivity	Bluetooth, AUX, USB drive, TF card
Impedance	4Ω
Output power	Bass50W x 1 + Treble15W x 2
Signal-to-noise ratio	>80dB
Frequency response	100Hz-20kHz
Dimensions	320W x 183 h x 118D mm
Housing material	ABS + PC + fabric mesh + PC
Net weight	2040G
Charging time	Approx. 3 h
Playback time	5-6 h(50% volume)
IP rating	IPX5 (source-stated)
Options	Microphone optional; confirm package contents.

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-007

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Features	Bluetooth , AUX, USB drive , TF card, lighting, Calling
Bluetooth chipset	Mountain View
Bluetooth version	Bluetooth 5.3
Wireless range	≤10M
Battery	4000mAh(21700) 3.7V
Charging input	DC5V 2A
Charging port	USB-C
Connectivity	Bluetooth, AUX, USB drive, TF card
Impedance	4Ω
Output power	10W x 2
Signal-to-noise ratio	>80dB
Frequency response	100Hz-20kHz
Dimensions	220.13W x 103 h x 90.87D mm
Housing material	ABS + PC + fabric mesh + PC
Net weight	845G
Charging time	Approx. 3 h
Playback time	7-8 h(50% volume)
IP rating	IPX5 (source-stated)

CSL branding mock-up. Final logo position and finish subject to approval.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-008

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

CSL branding mock-up. Final logo position and finish subject to approval.

Features	Bluetooth , AUX, USB drive , TF card, Lighting
Bluetooth chipset	JL
Bluetooth version	Bluetooth 5.4
Wireless range	≤10M
Battery	3000mAh(21700)
Charging input	DC5V 2A
Charging port	USB-C
Connectivity	Bluetooth, AUX, USB drive, TF card
Impedance	4Ω
Output power	10W x 2
Signal-to-noise ratio	>80dB
Frequency response	100Hz-20kHz
Dimensions	224.39 x 89.6 x 92.39 (unit not specified)
Housing material	ABS + PC + fabric mesh
Net weight	750G
Charging time	Approx. 3 h
Playback time	Approx. 3-5 h
IP rating	IPX5 (source-stated)

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-009

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

CSL branding mock-up. Final logo position and finish subject to approval.

Features	Bluetooth , AUX, USB drive , TF card, lighting
Bluetooth chipset	Mountain View
Bluetooth version	Bluetooth 5.3
Wireless range	≤10M
Battery	4000mAh(21700) 11.1V
Charging input	PD fast charging DC12V 2A
Charging port	USB-C
Connectivity	Bluetooth, AUX, USB drive, TF card
Impedance	4Ω
Output power	100W(Treble 10W x 2 + Mid/bass40W x 2)
Signal-to-noise ratio	>80dB
Frequency response	20Hz-20kHz
Dimensions	320W x 189 h x 126D mm
Housing material	ABS + silicone + fabric mesh
Net weight	Approx. 2700g
Charging time	Approx. 3 h
Playback time	Approx. 6 h(50%)
IP rating	IPX5 (source-stated)
Options	Microphone optional; confirm package contents.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-010

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

CSL branding mock-up. Final logo position and finish subject to approval.

Features	Bluetooth , AUX, USB drive , TF card, lighting
Bluetooth chipset	Mountain View
Bluetooth version	Bluetooth 5.3
Wireless range	≤10M
Battery	4000mAh(21700) 7.4V
Charging input	DC5V 2A
Charging port	USB-C
Connectivity	Bluetooth, AUX, USB drive, TF card
Impedance	4Ω
Output power	30W x 2
Signal-to-noise ratio	>80dB
Frequency response	20Hz-20kHz
Dimensions	281W x 167 h x 111D mm
Housing material	ABS + PC + fabric mesh
Net weight	Approx. 1715g
Charging time	Approx. 3 h
Playback time	Approx. 3-5 h(50%)
IP rating	IPX5 (source-stated)
Options	Microphone optional; confirm package contents.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-011

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

CSL branding mock-up. Final logo position and finish subject to approval.

Features	Bluetooth , AUX, USB drive , TF card, lighting
Bluetooth chipset	Mountain View
Bluetooth version	Bluetooth 5.3
Wireless range	≤10M
Battery	2600mAh(18650) 7.4V
Charging input	DC5V 2A
Charging port	USB-C
Connectivity	Bluetooth, AUX, USB drive, TF card
Impedance	3Ω
Output power	20W x 2
Signal-to-noise ratio	>80dB
Frequency response	20Hz-20kHz
Dimensions	247W x 147 h x 97D mm
Housing material	ABS + silicone + fabric mesh
Net weight	1220G
Charging time	Approx. 3 h
Playback time	Approx. 5-6 h (50% volume)
IP rating	IPX5 (source-stated)
Options	Microphone optional; confirm package contents.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-012

Karaoke / party speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Features	Bluetooth , TF card, AUX, USB drive , Lighting, Wireless microphone (UHF band)
Bluetooth chipset	Mountain View
Bluetooth version	Bluetooth 5.3
Wireless range	≤10 m
Power supply	External power 18V 2.5A
Connectivity	Bluetooth TF card AUX USB drive
Impedance	4Ω
Driver size	Woofer6.5 in, Tweeter3 in x 2
Rated power	30W x 1 + 15W x 2
Signal-to-noise ratio	>80dB
Frequency response	20Hz-20kHz
Dimensions	400 x 180 x 320mm
Net weight	5280g
Housing material	wood + steel grille

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-013

Clock & home speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Features	Bluetooth , TF card, AUX, USB drive , Clock, Wireless charging
Bluetooth chipset	AB
Bluetooth version	Bluetooth 5.4
Wireless range	≤10 m
Charging input	DC12V 2.5A
Charging port	USB-C
Connectivity	Bluetooth AUX (3.5mm audio jack) TF card USB drive
Impedance	4Ω
Output power	10W x 2
Signal-to-noise ratio	≥70dB
Frequency response	100Hz-18kHz
Dimensions	230 x 100 x 110mm
Housing material	ABS + fabric mesh

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-014

Compact Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Features	BluetoothTF card AUX TWS Multicolour lighting
Bluetooth chipset	AB5605A
Bluetooth version	Bluetooth 6.0
Wireless range	≤10 m
Battery	1200mAh(18650)
Power supply	USB DC5V 1A
Charging port	USB-C
Connectivity	Bluetooth TF card AUX
Impedance	4Ω
Driver size	40mm external-magnet driver
Rated power	5W
Signal-to-noise ratio	≥80dB
Frequency response	20Hz-20kHz
Dimensions	103 x 57 x 52mm
Net weight	188G
Charging time	Approx. 3 h
Playback time	Approx. 3-5 h (65% volume)
Housing material	ABS

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-015

Compact Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Features	Bluetooth, calling, TF card AUX TWS Lighting
Bluetooth chipset	AB
Bluetooth version	Bluetooth 6.0
Wireless range	≤10 m
Battery	1200mAh(18650)
Power supply	USB DC5V 2A
Charging port	USB-C
Connectivity	Bluetooth TF card AUX
Impedance	4Ω
Driver size	52mm external-magnet driver
Rated power	5W x 1
Signal-to-noise ratio	≥80dB
Frequency response	20Hz-20kHz
Dimensions	110 x 55 x 85mm
Net weight	290G
Charging time	Approx. 3 h
Playback time	Approx. 5-7 h (65% volume)
Housing material	ABS + silicone + fabric
IP rating	IPX5 (source-stated)

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-016

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE



Features	Bluetooth, calling, TF card AUX TWS Lighting (6 modes)
Bluetooth chipset	AB5605B
Bluetooth version	Bluetooth 6.0
Wireless range	≤10 m
Battery	1200mAh(18650)
Power supply	USB DC5V 2A
Charging port	USB-C
Connectivity	Bluetooth TF card AUX
Impedance	4Ω
Driver size	57mm external-magnet driver
Rated power	5W x 2
Signal-to-noise ratio	≥80dB
Frequency response	100Hz-20kHz
Dimensions	220 x 80 x 80.5mm
Net weight	Not specified
Charging time	Approx. 3 h
Playback time	Approx. 6-7 h (65% volume)
Housing material	ABS + silicone + fabric mesh
Optional upgrade	AB5602B chipset; 2 x 10 W drivers; 2400 mAh (18650) battery
IP rating	IPX5 (source-stated)

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-017

Desktop speaker system

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Features	Bluetooth AUX
Channels	2.1
Controls	Rotary knob
Bluetooth chipset	AB
Bluetooth version	Bluetooth 6.0
Wireless range	≤10 m
Power supply	USB DC5V 1A
Connectivity	Bluetooth , 3.5 mm audio plug
Impedance	4Ω
Driver size	Woofer: 4 in square; tweeter: 2 in square
Output power	5W x 1 + 2.5W x 2
Input sensitivity	850±50mV
Distortion	1%
Signal-to-noise ratio	≥80dB
Frequency response	100Hz-20kHz
Dimensions	Subwoofer: L 139.68 x W 123.58 x H 171.18mm/
Satellite dimensions	L 76.42 x W 75.55 x H 104.92mm
Net weight	840g
Housing material	ABS

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-018

Desktop speaker system

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Features	Bluetooth USB drive, TF card AUX
Channels	2.1
Controls	Rotary knob
Bluetooth chipset	AB5363B
Bluetooth version	Bluetooth 6.0
Wireless range	≤10 m
Power supply	USB DC5V 1A
Connectivity	Bluetooth 3.5 mm audio plug USB playback TF card
Impedance	4Ω
Driver size	Woofer: 4 in square; tweeter: 2 in square
Output power	5W x 1 + 3W x 2
Input sensitivity	850±50mV
Distortion	1%
Signal-to-noise ratio	≥80dB
Frequency response	100Hz-20kHz
Dimensions	Subwoofer: L 180 x W 121 x H 140mm/
Satellite dimensions	L 76 x W 74 x H 101mm
Net weight	1226g
Housing material	ABS + steel grille

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-019

Desktop speaker system

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Features	Bluetooth
Channels	2.1
Bluetooth chipset	AB
Bluetooth version	6.0
Power input	DC 5V 1000mA
Output power	5 W + 2 x 3 W; first driver count to be confirmed
Frequency response	50-20000Hz
Impedance	4Ω
Signal-to-noise ratio	≥60dB
Distortion	<1%
Connectivity	Bluetooth
Housing material	ABS
Dimensions	Main unit 135 x 100 x 100mm Satellite 73 x 64 x 59mm

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-020

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

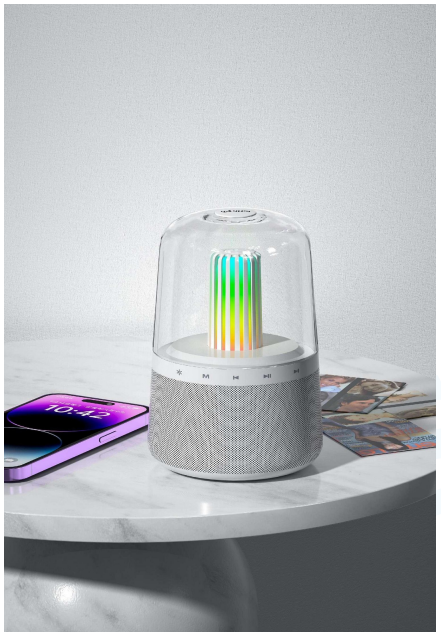



Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Features	Bluetooth , AUX, USB drive , Lighting
Bluetooth chipset	AB5602B
Bluetooth version	Bluetooth 5.4
Wireless range	≤10M
Battery	2200mAh(18650)
Charging input	DC5V 1A
Charging port	USB-C
Connectivity	Bluetooth AUX (3.5mm audio jack) USB
Impedance	4Ω
Output power	5W x 2
Signal-to-noise ratio	≥80dB
Frequency response	100Hz-20kHz
Dimensions	Φ107 x 160mm
Housing material	ABS + PC + steel grille
Net weight	Approx. 450g
Charging time	Approx. 3 h
Playback time	Approx. 8 h (65% volume)

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-021

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Features	Bluetooth , Lighting
Bluetooth chipset	AB
Bluetooth version	Bluetooth 6.0
Wireless range	≤10M
Battery	1800mAh(18650)
Charging input	DC5V 2000mA
Charging port	USB-C
Connectivity	Bluetooth
Impedance	4Ω
Driver size	52mm external-magnet driver
Output power	10W x 1
Signal-to-noise ratio	≥80dB
Frequency response	50Hz-20kHz
Dimensions	H 202.5 x Dia. 92.8mm
Housing material	ABS + PC + silicone + steel grille
Net weight	700g
Charging time	Approx. 3 h
Playback time	Approx. 8 h (65% volume)
IP rating	To be confirmed: source lists IPX7 and IPX4-5

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-022

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Features	Bluetooth , AUX, USB drive , Lighting, IPX7
Bluetooth chipset	Mountain View
Bluetooth version	Bluetooth 5.3
Wireless range	≤10 m
Battery	4000mAh(18650)
Charging input	DC5V 3A
Power supply	Built-in lithium battery 11.1V
Charging port	USB-C
Connectivity	Bluetooth USB drive AUX(3.5mm audio jack)
Impedance	4Ω
Driver size	Tweeter 2 x 2.25 in/Mid/bass driver 2 x 3 in
Output power	100W (Tweeter 2 x 10W + Mid/bass driver 2 x 40W)
Signal-to-noise ratio	≥80dB
Frequency response	50Hz-20kHz
Dimensions	362W x 140 h x 125D mm
Housing material	ABS + silicone + steel grille
Net weight	3000g
Charging time	Approx. 2 h
Playback time	Approx. 3-5 h (65% volume)
IP rating	IPX7 (source-stated)
Options	Microphone optional; confirm package contents.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-023

Portable Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Features	Bluetooth , AUX, USB drive , Lighting, IPX7
Bluetooth chipset	AB
Bluetooth version	Bluetooth 6.0
Wireless range	≤10 m
Battery	1800mAh(18650)
Charging input	DC5V 2000mA
Charging port	USB-C
Connectivity	Bluetooth USB drive AUX
Impedance	4Ω
Driver size	52mm external-magnet driver
Output power	5W x 2
Signal-to-noise ratio	≥80dB
Frequency response	100Hz-20kHz
Dimensions	H 246.7 x Dia. 132mm
Housing material	ABS + PC + TPE + silicone
Net weight	1000g
Charging time	Approx. 2 h
Playback time	Approx. 8 h (65% volume)
IP rating	IPX7 (source-stated)
Options	Microphone optional; confirm package contents.

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-024

Karaoke / party speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Features	Bluetooth , AUX, TF card , Lighting, IPX5
Bluetooth chipset	AB
Bluetooth version	Bluetooth 6.0
Wireless range	≤10 m
Battery	1800mAh
Charging input	DC5V 2000mA
Charging port	USB-C
Connectivity	Bluetooth TF card AUX
Impedance	4Ω
Driver size	52mm external-magnet driver
Output power	5W x 2
Signal-to-noise ratio	≥80dB
Frequency response	100Hz-20kHz
Dimensions	L 201 x W 63.5 x H 144.6mm
Housing material	ABS + PC + silicone + fabric
Net weight	985g
Charging time	Approx. 2 h
Playback time	Approx. 6 h (65% volume)
Options	Microphone optional; confirm package contents.

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-025

Karaoke / party speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Features	Bluetooth , TF card, AUX, USB drive , Lighting
Bluetooth chipset	AB
Bluetooth version	Bluetooth 6.0
Wireless range	≤10 m
Battery	2400mAh 3.7V(18650)
Charging input	DC5V 2A
Charging port	USB-C
Connectivity	Bluetooth USB drive AUX TF
Impedance	4Ω
Driver size	116mm external-magnet driver
Output power	10W x 1
Signal-to-noise ratio	≥80dB
Frequency response	50Hz-20kHz
Dimensions	L 150 x W 150 x H 154.5mm
Housing material	ABS + PC + steel grille + silicone
Net weight	935g
Charging time	Approx. 3 h
Playback time	Approx. 4-8 h (65% volume)
Options	Microphone optional; confirm package contents.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-026

Karaoke / party speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Features	Bluetooth , TF card, AUX, USB drive , Lighting
Bluetooth chipset	AB
Bluetooth version	Bluetooth 6.0
Wireless range	≤10 m
Battery	2400mAh 3.7V(18650)
Charging input	DC5V 2A
Charging port	USB-C
Connectivity	Bluetooth USB drive AUX TF
Impedance	4Ω
Driver size	116mm external-magnet driver
Output power	10W x 1
Signal-to-noise ratio	≥80dB
Frequency response	50Hz-20kHz
Dimensions	L 150 x W 150 x H 154.5mm
Housing material	ABS + PC + steel grille + silicone
Net weight	980g
Charging time	Approx. 3 h
Playback time	Approx. 4-8 h (65% volume)
Options	Two microphones optional; confirm package contents.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-027

Compact Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Features	Bluetooth , AUX, IPX7
Bluetooth chipset	AB
Bluetooth version	Bluetooth 6.0
Wireless range	≤10 m
Battery	1500mAh
Charging input	DC5V 2000mA
Charging port	USB-C
Connectivity	Bluetooth , AUX
Impedance	4Ω
Driver size	52mm internal-magnet driver
Output power	10W x 1
Signal-to-noise ratio	≥80dB
Frequency response	100Hz-20kHz
Dimensions	172W x 106 h x 46D mm
Housing material	ABS + silicone + fabric
Charging time	Approx. 3 h
Playback time	Approx. 4 h (65% volume)
IP rating	IPX7 (source-stated)

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.

CSL-AU-028

Compact Bluetooth speaker

OEM BRANDING AVAILABLE | YOUR LOGO HERE

Top/body logo printing and custom packaging: placement and MOQ on enquiry.

Features	Bluetooth , TF card, AUX, USB drive , Lighting, FM
Bluetooth chipset	AB
Bluetooth version	Bluetooth 6.0
Wireless range	≤10 m
Battery	1200mAh(18650)
Charging input	DC5V 1000mA
Charging port	USB-C
Connectivity	Bluetooth AUX (3.5mm audio jack) TF card USB
Impedance	4Ω
Driver size	52 mm square external-magnet driver
Output power	3W x 2
Signal-to-noise ratio	≥80dB
Frequency response	100Hz-20kHz
Dimensions	198W x 78.5 h x 53D mm
Housing material	ABS + fabric
Net weight	460g
Charging time	Approx. 3 h
Playback time	Approx. 4-8 h (65% volume)
Options	Optional upgrade: battery1800mAh, driver5W*2

Source-stated specifications. Final specification, accessories and packing to be confirmed on enquiry.