

CSL IMPEX / SOURCING & PROCUREMENT

Grooming & Personal Care

Hair clippers, detail trimmers and additional style selections. English specification tables and OEM sourcing support.

19 detailed configurations

Source Globally. Trade Seamlessly.

Product selection • Technical information
OEM and private-label enquiries
International sourcing and logistics

September 2026
Specifications are source-stated and subject to order confirmation.

CSL-GR-001

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	160 × 40 × 42
Battery cell / capacity (mAh)	18650 / 1500
Source electrical rating	5V / 350mA
Charging connection / time	USB-C / approx. 2.5 hours
Housing material	ABS
Stated runtime	180 minutes
Carton size (cm)	60.5 × 40.5 × 36.5
Carton quantity / weight	60 pieces / 25 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-GR-002

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	140 × 38 × 40
Battery cell / capacity (mAh)	18650 / 1200
Source electrical rating	5V / 350mA
Charging connection / time	USB-C / approx. 2 hours
Housing material	ABS
Stated runtime	180 minutes
Carton size (cm)	60.5 × 40.5 × 36.5
Carton quantity / weight	60 pieces / 25 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-GR-003

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	160 × 42 × 42
Battery cell / capacity (mAh)	14500 / 500
Source electrical rating	3.7V / 350mA
Charging connection / time	USB-C / approx. 3 hours
Housing material	ABS
Stated runtime	60 minutes
Carton size (cm)	45.5 × 39 × 41.5
Carton quantity / weight	100 pieces / 20 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-GR-004

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	192 × 58 × 45
Battery cell / capacity (mAh)	18650 / 1500
Source electrical rating	3.7V / 350mA
Charging connection / time	USB-C / approx. 4 hours
Housing material	ABS
Stated runtime	180 minutes
Carton size (cm)	75 × 35.5 × 50
Carton quantity / weight	50 pieces / 25 kg

Source heading and model table conflict. Confirm the pictured configuration and specification before order.

CSL-GR-005

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	192 × 58 × 45
Battery cell / capacity (mAh)	18650 / 1500
Source electrical rating	3.7V / 350mA
Charging connection / time	USB-C / approx. 4 hours
Housing material	ABS
Stated runtime	180 minutes
Carton size (cm)	75 × 35.5 × 50
Carton quantity / weight	50 pieces / 25 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-GR-006

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	175 × 37 × 33
Battery cell / capacity (mAh)	18650 / 800
Source electrical rating	3.7V / 350mA
Charging connection / time	USB-C / approx. 4 hours
Housing material	ABS
Stated runtime	90 minutes
Carton size (cm)	45.5 × 39 × 41.5
Carton quantity / weight	100 pieces / 18 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-GR-007

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	170 × 45 × 35
Battery cell / capacity (mAh)	18650 / 2500
Source electrical rating	3.7V / 350mA
Charging connection / time	USB-C / approx. 6 hours
Housing material	ABS
Stated runtime	240 minutes
Carton size (cm)	43 × 37 × 70
Carton quantity / weight	50 pieces / 20 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-GR-008

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	192 × 58 × 45
Battery cell / capacity (mAh)	18650 / 1500
Source electrical rating	3.7V / 350mA
Charging connection / time	USB-C / approx. 4 hours
Housing material	Confirm material*
Stated runtime	180 minutes
Carton size (cm)	75 × 35.5 × 50
Carton quantity / weight	50 pieces / 25 kg

* Source calls this a plastic version but lists zinc alloy. Housing material requires confirmation.

CSL-GR-009

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	190 × 55 × 42
Battery cell / capacity (mAh)	18650 / 1500
Source electrical rating	3.7V / 350mA
Charging connection / time	USB-C / approx. 4 hours
Housing material	Zinc alloy
Stated runtime	180 minutes
Carton size (cm)	49.5 × 35.5 × 61
Carton quantity / weight	50 pieces / 30 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-GR-010

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	190 × 55 × 42
Battery cell / capacity (mAh)	18650 / 2500
Source electrical rating	3.7V / 350mA
Charging connection / time	USB-C / approx. 4 hours
Housing material	ABS
Stated runtime	300 minutes
Carton size (cm)	49.5 × 35.5 × 61
Carton quantity / weight	50 pieces / 21 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-GR-011

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	153 × 42 × 32
Battery cell / capacity (mAh)	18650 / confirm capacity*
Source electrical rating	3.7V / 350mA
Charging connection / time	USB-C / approx. 4.5 hours
Housing material	Zinc alloy
Stated runtime	120 minutes
Carton size (cm)	43 × 37 × 70
Carton quantity / weight	50 pieces / 21 kg

* Source states both 800 and 1200 mAh. Battery capacity requires confirmation.

CSL-GR-012

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	153 × 42 × 31
Battery cell / capacity (mAh)	18650 / 1200
Source electrical rating	3.7V / 350mA
Charging connection / time	USB-C / approx. 4.5 hours
Housing material	Zinc alloy
Stated runtime	120 minutes
Carton size (cm)	43 × 37 × 70
Carton quantity / weight	50 pieces / 21 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-GR-013

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	153 × 42 × 31
Battery cell / capacity (mAh)	18650 / 1200
Source electrical rating	3.7V / 350mA
Charging connection / time	USB-C / approx. 4.5 hours
Housing material	Zinc alloy
Stated runtime	120 minutes
Carton size (cm)	43 × 37 × 70
Carton quantity / weight	50 pieces / 21 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-GR-014

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	175 × 37 × 33
Battery cell / capacity (mAh)	18650 / 800
Source electrical rating	3.7V / 350mA
Charging connection / time	USB-C / approx. 4 hours
Housing material	ABS
Stated runtime	90 minutes
Carton size (cm)	45.5 × 39 × 41.5
Carton quantity / weight	100 pieces / 18 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-GR-015

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	160 × 42 × 42
Battery cell / capacity (mAh)	14500 / 500
Source electrical rating	3.7V / 350mA
Charging connection / time	USB-C / approx. 3 hours
Housing material	ABS
Stated runtime	60 minutes
Carton size (cm)	51.5 × 40 × 60
Carton quantity / weight	100 pieces / 20 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-GR-016

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	160 × 35 × 32
Battery cell / capacity (mAh)	18650 / 800
Source electrical rating	5V / 350mA
Charging connection / time	USB-C / approx. 3 hours
Housing material	ABS
Stated runtime	90 minutes
Carton size (cm)	48 × 42 × 48
Carton quantity / weight	100 pieces / 20 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-GR-017

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	120 × 40 × 29
Battery cell / capacity (mAh)	18500 / 900
Source electrical rating	5V / 350mA
Charging connection / time	USB-C / approx. 4 hours
Housing material	ABS
Stated runtime	150 minutes
Carton size (cm)	30.5 × 33 × 42
Carton quantity / weight	50 pieces / 13 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-GR-018

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	153 × 42 × 31
Battery cell / capacity (mAh)	18650 / 800
Source electrical rating	3.7V / 350mA
Charging connection / time	USB-C / approx. 2 hours
Housing material	Zinc alloy
Stated runtime	100 minutes
Carton size (cm)	45.5 × 39 × 35
Carton quantity / weight	100 pieces / 20 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-GR-019

OEM branding: product-top / body placement subject to feasibility.



Dimensions (mm)	153 × 42 × 31
Battery cell / capacity (mAh)	18650 / 800
Source electrical rating	3.7V / 350mA
Charging connection / time	USB-C / approx. 2 hours
Housing material	Zinc alloy
Stated runtime	100 minutes
Carton size (cm)	45.5 × 34 × 41.5
Carton quantity / weight	100 pieces / 20 kg

Source-stated specifications; confirm final sample, accessories, packing and performance.

CSL-ST-01 / Style selection

OEM branding and custom finishes available on enquiry.



Quote the CSL-ST collection plus grid position (e.g. A1). Specifications and packing require confirmation.

CSL-ST-02 / Style selection


OEM branding and custom finishes available on enquiry.



Quote the CSL-ST collection plus grid position (e.g. A1). Specifications and packing require confirmation.

CSL-ST-03 / Style selection


OEM branding and custom finishes available on enquiry.

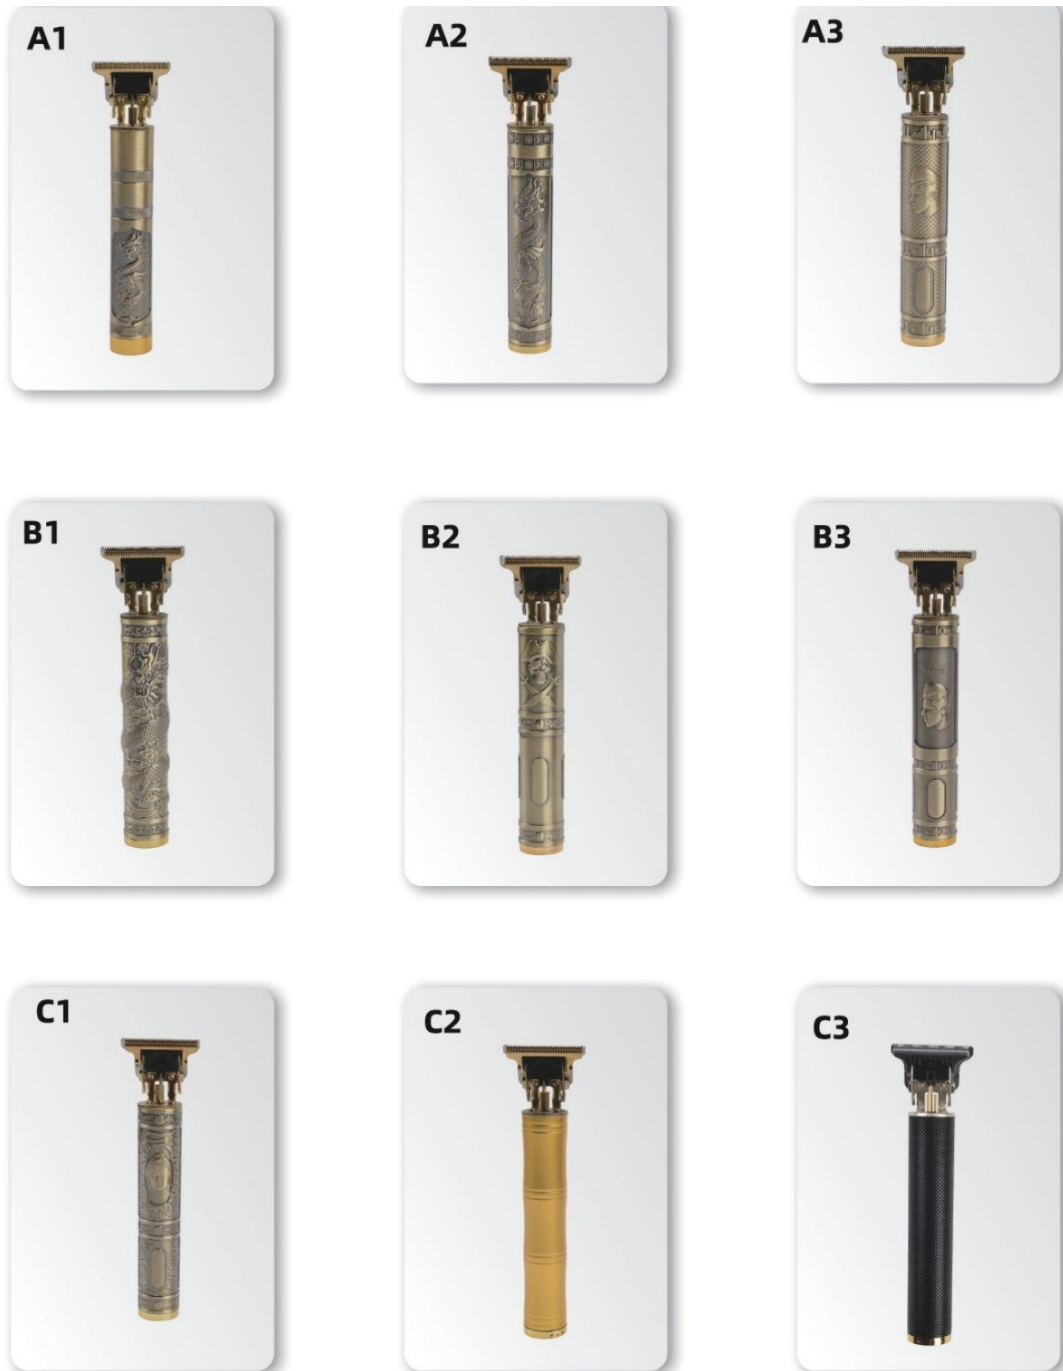

Quote the CSL-ST collection plus grid position (e.g. A1). Specifications and packing require confirmation.

CSL-ST-04 / Style selection

OEM branding and custom finishes available on enquiry.

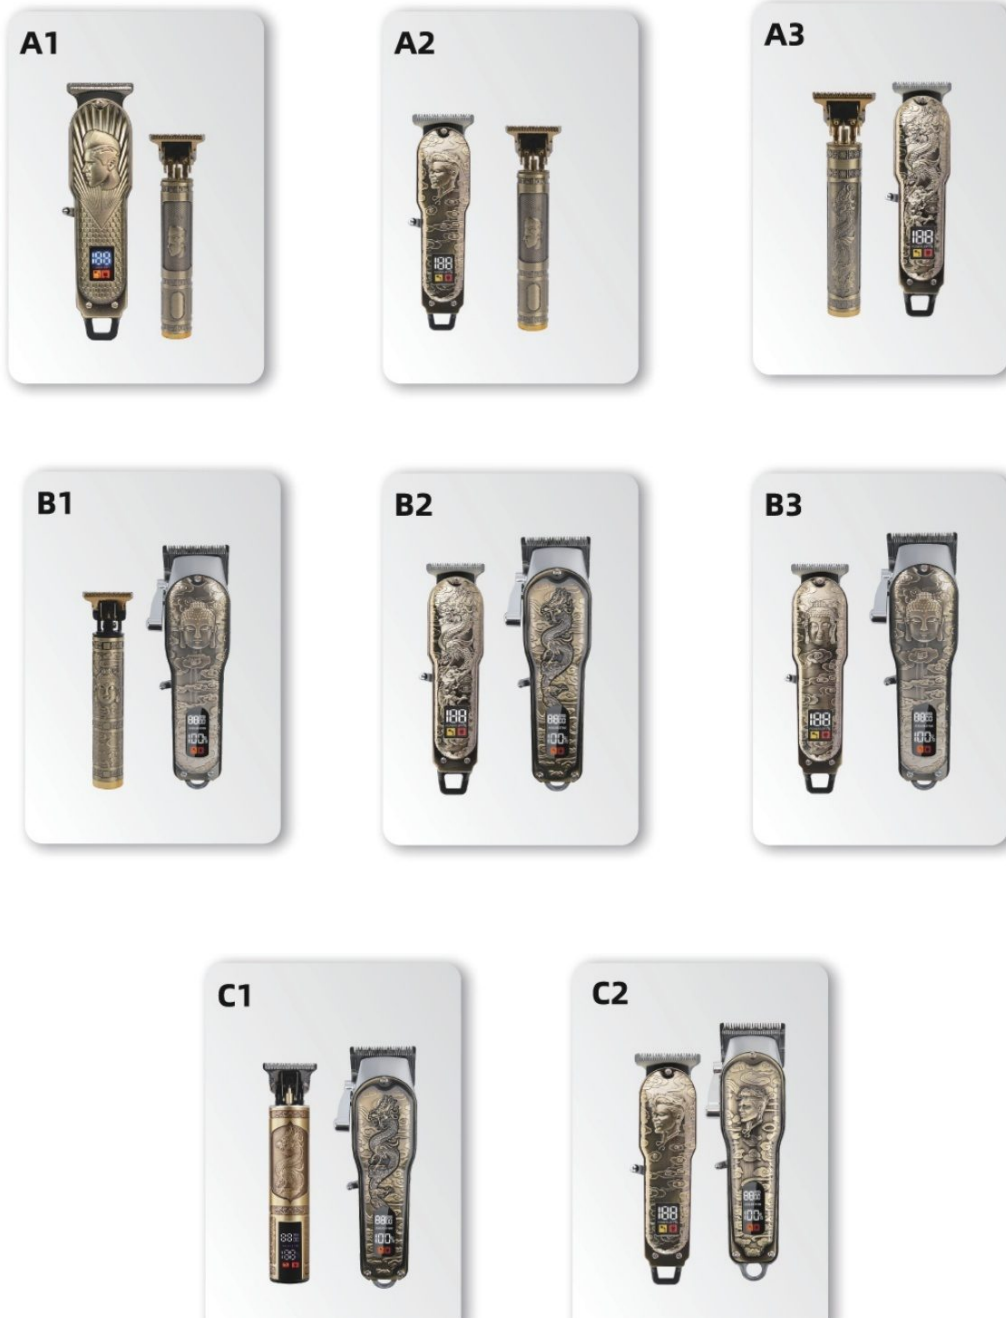

Quote the CSL-ST collection plus grid position (e.g. A1). Specifications and packing require confirmation.

CSL-ST-05 / Style selection

OEM branding and custom finishes available on enquiry.



Quote the CSL-ST collection plus grid position (e.g. A1). Specifications and packing require confirmation.

WORK WITH CSL IMPEX

Your China sourcing link

**Sourcing and Procurement
Custom Products & OEM Manufacturing
Logistics — Air, Land and Sea
QC and Reporting • Documentation • Negotiation**

Room No. 503/C Wing, Garden Court Complex,
Behind Maxus Mall, Bhayander West,
Mumbai, India 401101

Email: psdsc.jalan@gmail.com
Email: cslimpex@yahoo.com
WhatsApp: +91 7738424384 / +91 8169502362
WeChat: Chandrasukh

OEM branding available on enquiry
Please share the CSL reference, quantity, destination, logo artwork, packaging requirements and required performance. Product-top or body logo placement, printing method, MOQ, packing and lead time require confirmation.