



REFUSE INCINERATOR

Environmental equipment catalogue

**Fully enclosed refuse-incineration systems
and representative technical configurations.**



Sourcing support for incineration equipment

CSL IMPEX supports international buyers with product sourcing, supplier coordination, purchasing, specification alignment, packaging, documentation and shipment follow-up. This brochure presents representative refuse-incinerator configurations available for technical and commercial sourcing coordination.

PRODUCT SOURCING

Supplier search, comparisons and quotation coordination

TECHNICAL ALIGNMENT

Application, material, capacity and specification confirmation

ORDER FOLLOW-UP

Sampling, production updates and quality checkpoints

EXPORT SUPPORT

Packaging, documentation and shipment coordination

垃圾焚烧炉

REFUSE INCINERATOR



司引进世界先进焚烧炉技术，并组织技术专家进行攻关，开发研制出的具有自主知识产权的生活垃圾焚烧处理设备。该设备具有全封闭，体积小、焚烧效率高、工艺合理、技术领先、无害化程度高等特点，是各类医院、宾馆、车站、大型商业机构、企业、事业单位理想的垃圾处理设备。


燃烧方式



主要特点

- 1、采用气化焚烧技术，适用于焚烧注射器、点滴容器等生活器材以及各类纸质废材、绷带、脱脂棉、各种生活污物与医院、生活机构排出的各种废物。
- 2、采用气化焚烧方式，每天产生的垃圾可一次焚烧处理。
- 3、利用气化焚烧、混合焚烧、燃尽处理等技术，使排烟、烟尘含量等低于国家规定排放标准。
- 4、采用全封闭运行，适用于处理感染性生活废物，避免二次污染。
- 5、体积小，占地面积小。
- 6、该系列焚烧炉以轻柴油为燃料，用户可根据需要采用不同类型。

流程图

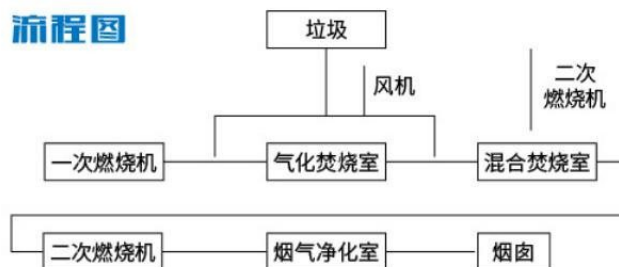

项目	XJY-20	XJY-30	XJY-50	XJY-100	XJY-200	XJY-300	XJY-500
焚烧能力	20-30 kg/h	30-50 kg/h	50-100 kg/h	100-150 kg/h	200-300kg/h	300-400kg/h	400-500kg/h
焚烧炉尺 m (L×B×H)	0.9×0.6×2.0	1.45×0.9×2.75	1.8×1.15×3	2×1.4×3.5	2.2×1.4×3.8	3×2×4.8	3.3×2.3×4.8
垃圾投入口 尺寸 (mm)	400×520	480×600	620×800	760×960	900×1100	1080×1280	1080×1280
烟囱 (mm)	外径 ø133	外径 ø280	外径 ø280	外径 ø300	外径 ø400	外径 ø460	外径 ø480
引风机	0.25kw	0.25kw	0.37kw	0.55kw	0.75kw	1.1kw	1.1kw
助燃燃烧器 (估计数据)	功率 0.09kw 耗油量 3-5kg/h	功率 0.15kw 耗油量 4-10kg/h	功率 0.15kw 耗油量 4-10kg/h	功率 0.15kw 耗油量 4-10kg/h	功率 0.15kw 耗油量 7-14kg/h	功率 0.15kw 耗油量 7-14kg/h	功率 0.15kw 耗油量 7-14kg/h
再燃燃烧器 (估计数据)	功率 0.09kw 耗油量 3-5kg/h	功率 0.15kw 耗油量 4-10kg/h	功率 0.15kw 耗油量 4-10kg/h	功率 0.37kw 耗油量 7-14kg/h	功率 0.37kw 耗油量 10-20kg/h	功率 0.37kw 耗油量 15-26kg/h	功率 0.37kw 耗油量 15-26kg/h
运行电压	380V 或 220V	380V 或 220V	380V 或 220V	380V 或 220V	380V 或 220V	380V 或 220V	380V 或 220V
重量约 (kg)	1600	4000	5000	8000	8500	16500	20000

注：技术参数如有变动恕不通知。



OTHER CASES





Discuss your incinerator requirement

Chandrasukh | CSL IMPEX - China Sourcing Link

Mobile / WhatsApp: +91 77384 24384

Additional contact: +91 81695 02362

Email: psdsc.jalan@gmail.com

Email: cslimpex@yahoo.com

WeChat: Chandrasukh

Head Office: Room No. 503/C Wing, Garden Court Complex, Behind
Maxus Mall, Bhayander West, Mumbai, India 401101

Branch Office: Address to be updated



SCAN FOR WHATSAPP